




PDC BITS

8 1/2" KDC568M

DESIGN FEATURES:

- Cast Infiltrated Tungsten Carbide matrix shell for maximum erosion and abrasion resistance.
- 3D designed and CNC machined internal steel blank for maximum blade and body strength.
- TSP Diamond enhanced gage pads for maximum protection.
- Optimized parabolic profile for blade count, cutter quantity and bit stability.
- Force-Balanced PDC cutter locations minimize bit whirl and drill a precise round hole.
- Asymmetric blade design reduces drilling harmonics.

Body Type	Matrix Body
Gage Length	1.50 in.
Overall Length	15.54 in.
Shipping Weight	TBD
Pin Connection	4-1/2" API Regular
Fishneck Diameter	5.75 in.
Fishneck Length	5.05 in.
Make-Up Length	11.36 in.
Make-Up Torque	16,500 to 18,100 ft/lbs
Face Cutters	35 @ 16mm PDC
Gage Cutters	6 @ 13mm PDC
Nozzle Type	8 @ LOP Nozzle
TFA (min – max)	0.61 in ² to 2.45 in ²
Weight on Bit (WOB)	4,000 to 20,000 lbs.
Rotary Speed (RPM)	60 to 250 RPM

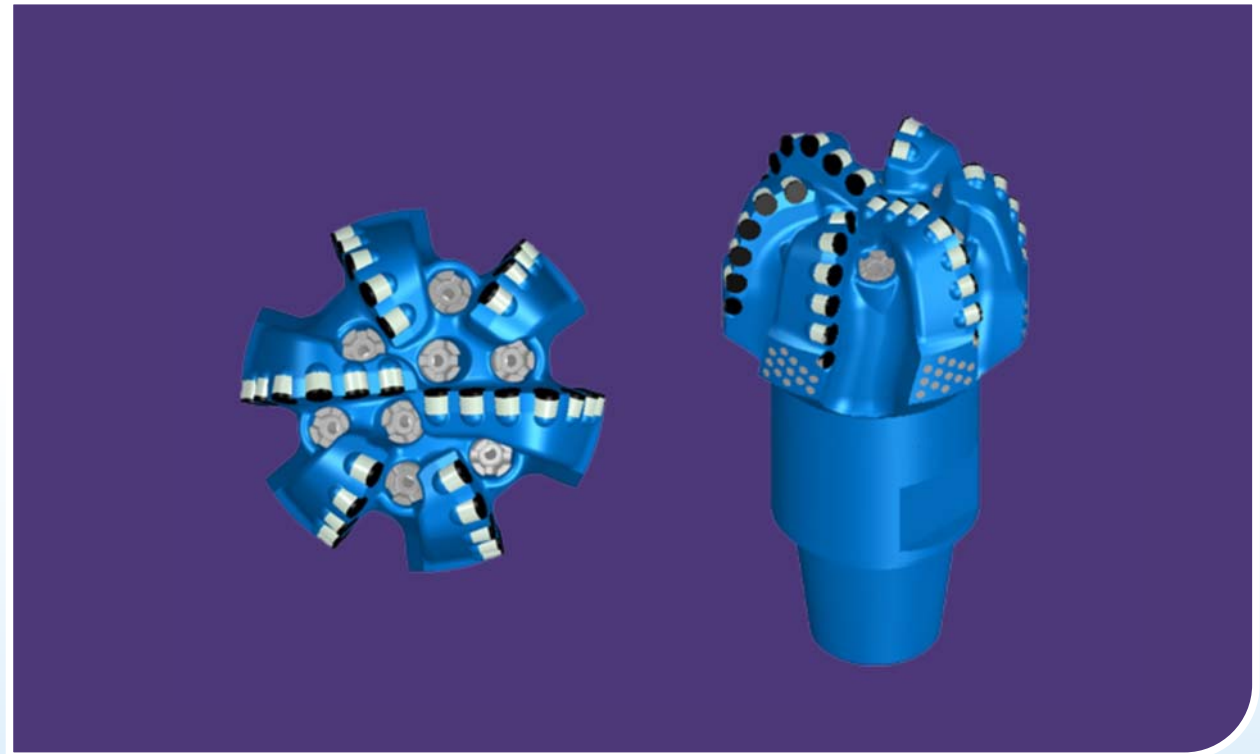

www.kazduco.com

Member of the FSU investment group

OFFICE IN THE NETHERLANDS

Laan 1933 # 37, 6711 NX EDE
Phone: +31 (318) 504499
Fax: +31 (318) 614752

OFFICE IN KAZAKHSTAN:

Office 304, Kurmangazy St. 48a
Almaty, Kazakhstan
Tel./fax: +7 (727) 261 38 58
E-mail: bits@kazduco.com