




PDC BITS

8 1/2" KDC568MX

DESIGN FEATURES:

- Cast Infiltrated Tungsten Carbide matrix shell for maximum erosion and abrasion resistance.
- 3D designed and CNC machined internal steel blank for maximum blade and body strength.
- TSP Diamond enhanced gage pads for maximum protection.
- Optimized parabolic profile for blade count, cutter quantity and bit stability.
- Force - Balanced PDC cutter locations minimize bit whirl and drill a precise round hole.
- Asymmetric blade design reduces drilling harmonics.

| | |
|---------------------------|--|
| Body Type | Matrix Body |
| Gage Length | 1.50 in. |
| Overall Length | 15.54 in. |
| Shipping Weight | TBD |
| Pin Connection | 4-1/2" API Regular |
| Fishneck Diameter | 5.75 in. |
| Fishneck Length | 5.05 in. |
| Make-Up Length | 11.36 in. |
| Make-Up Torque | 16,500 to 18,100 ft/lbs |
| Face Cutters | 35 @ 16mm PDC |
| Back-Up Cutters | 12 @ 13mm PDC |
| Gage Cutters | 6 @ 13mm PDC |
| Nozzle Type | 8 @ LOP Nozzle |
| TFA (min – max) | 0.61 in ² to 2.45 in ² |
| Weight on Bit (WOB) | 4,000 to 20,000 lbs. |
| Rotary Speed (RPM) | 60 to 250 RPM |

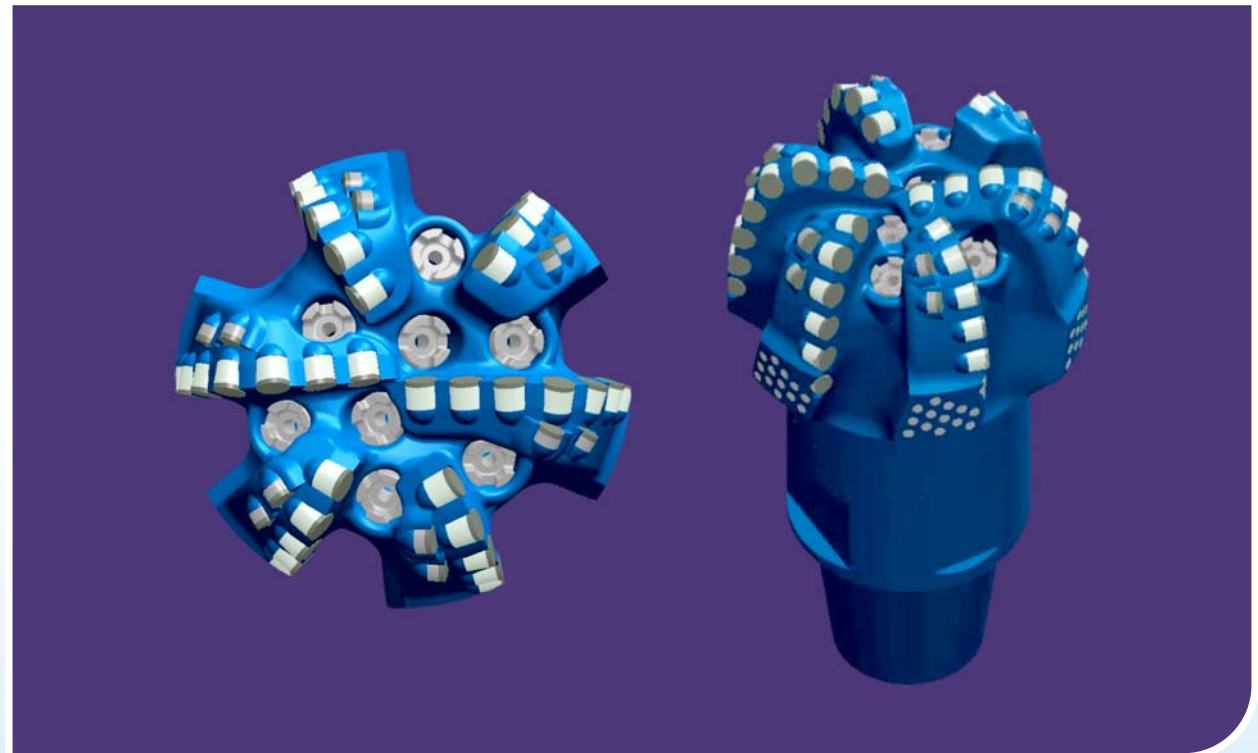

www.kazduco.com

Member of the FSU investment group

OFFICE IN THE NETHERLANDS

Laan 1933 # 37, 6711 NX EDE
 Phone: +31 (318) 504499
 Fax: +31 (318) 614752

OFFICE IN KAZAKHSTAN:

Office 304, Kurmangazy St. 48a
 Almaty, Kazakhstan
 Tel./fax: +7 (727) 261 38 58
 E-mail: bits@kazduco.com