




# PDC BITS

# 11 5/8" KDC568SX

## DESIGN FEATURES:

- 3D designed 4140 alloy steel body CNC machined for maximum blade and body strength.
- Tungsten Carbide hardfacing in critical areas for increased erosion and abrasion resistance.
- TCI enhanced gage pads for increased protection.
- Optimized parabolic profile for blade count, cutter quantity and bit stability.
- Force-Balanced PDC cutter locations minimize bit whirl and drill a precise round hole.
- Asymmetric blade design reduces drilling harmonics.

Body Type .....Two-piece 4140 Alloy Steel  
 Gage Length .....2.23 in.  
 Overall Length .....18.65 in.  
 Shipping Weight .....TBD  
 Pin Connection .....6-5/8" API Regular  
 Fishneck Diameter .....8.00 in.  
 Fishneck Length .....5.80 in.  
 Make-Up Length .....13.70 in.  
 Make-Up Torque .....38,000 to 41,800 ft/lbs  
 Face Cutters .....44 @ 16mm PDC  
 Back-Up Cutters .....18 @ 13mm PDC  
 Gage Cutters .....6 @ 13mm PDC  
 Nozzle Type .....8 @ LOP Nozzle  
 TFA (min – max) .....0.61 in<sup>2</sup> to 2.45 in<sup>2</sup>  
 Weight on Bit (WOB) .....5,000 to 25,000 lbs.  
 Rotary Speed (RPM) .....60 to 250 RPM

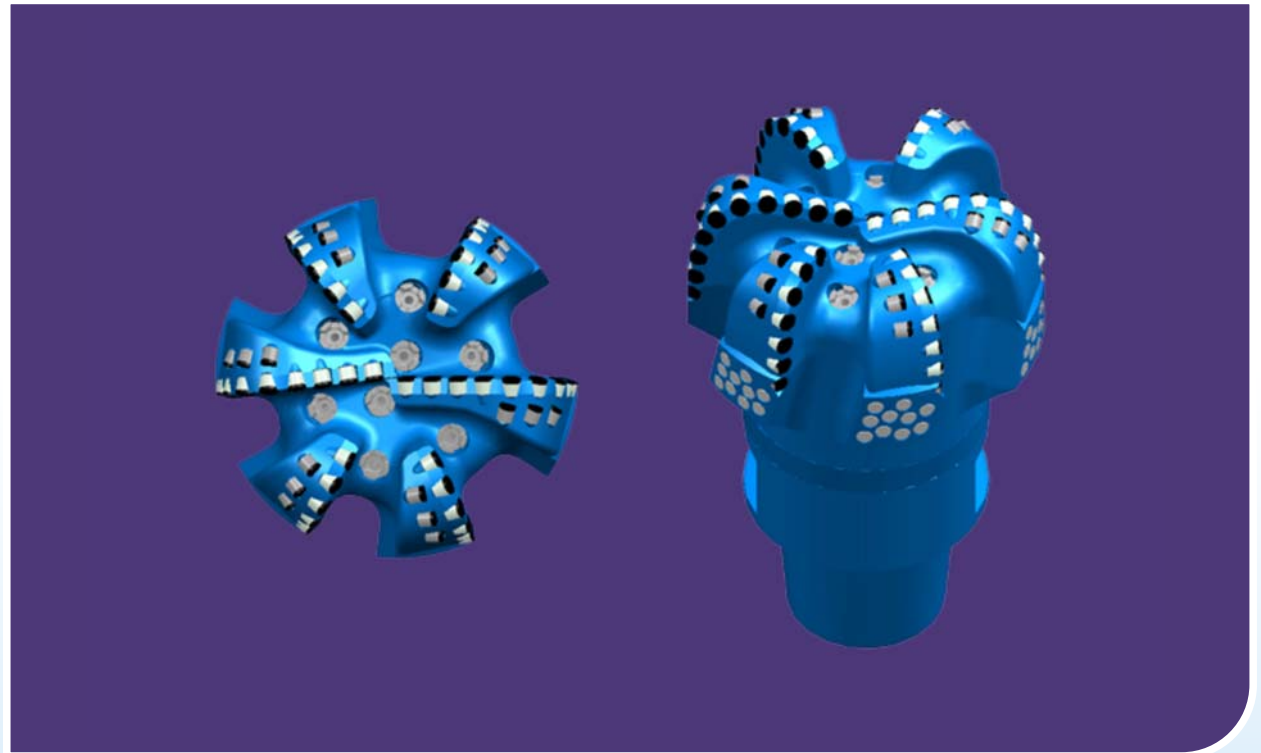

[www.kazduco.com](http://www.kazduco.com)

Member of the FSU investment group

### OFFICE IN THE NETHERLANDS

Laan 1933 # 37, 6711 NX EDE  
Phone: +31 (318) 504499  
Fax: +31 (318) 614752

### OFFICE IN KAZAKHSTAN:

Office 304, Kurmangazy St. 48a  
Almaty, Kazakhstan  
Tel./fax: +7 (727) 261 38 58  
E-mail: [bits@kazduco.com](mailto:bits@kazduco.com)