




PDC BITS

DESIGN FEATURES:

- 3D designed 4140 alloy steel body CNC machined for maximum blade and body strength.
- Tungsten Carbide hardfacing in critical areas for increased erosion and abrasion resistance.
- TCI enhanced gage pads for increased protection.
- Optimized parabolic profile for blade count, cutter quantity and bit stability.
- Force-Balanced PDC cutter locations minimize bit whirl and drill a precise round hole.
- Asymmetric blade design reduces drilling harmonics.

Body TypeOne-piece 4140 Alloy Steel
Gage Length1.500 in.
Overall Length10.238 in.
Shipping WeightTBD
Pin Connection3-1/2" API Regular
Fishneck Diameter4.375 in.
Fishneck Length2.250 in.
Make-Up Length6.488 in.
Make-Up Torque7,700 to 8,600 ft/lbs
Face Cutters15 @ 13mm PDC
Back-Up Face Cutters10 @ 13mm PDC
Nozzle Type3 @ MOP Nozzle
TFA (min – max)0.23 in² to 0.59 in²
Weight on Bit (WOB)3,000 to 15,000 lbs.
Rotary Speed (RPM)60 to 150 RPM

141mm KDC313SX

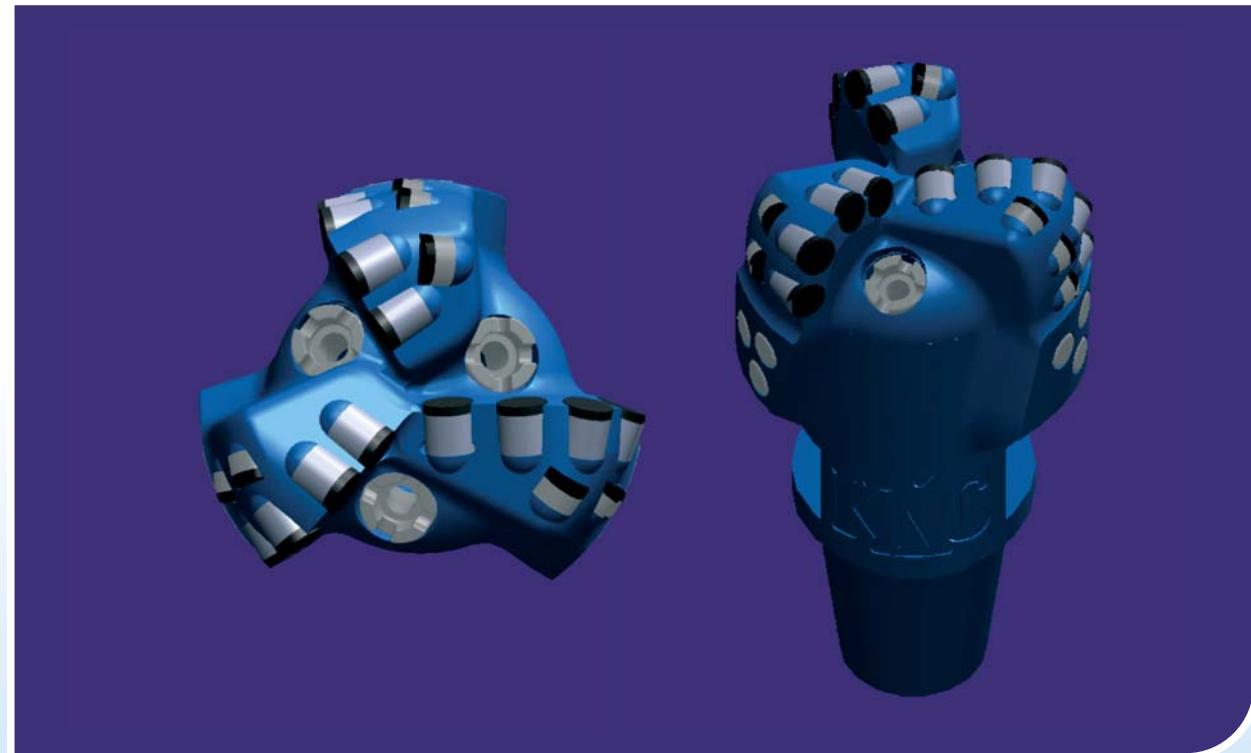

www.kazduco.com

Member of the FSU investment group

OFFICE IN THE NETHERLANDS

Laan 1933 # 37, 6711 NX EDE
Phone: +31 (318) 504499
Fax: +31 (318) 614752

OFFICE IN KAZAKHSTAN:

Office 304, Kurmangazy St. 48a
Almaty, Kazakhstan
Tel./fax: +7 (727) 261 38 58
E-mail: bits@kazduco.com